


SPECIFICATIONS

OUTLINE DRAWING

AO Medium	TeO ₂
Acoustic Mode	Shear, On Axis
Acoustic Velocity	0.617 mm/μs
Wavelength	364 nm
Input Polarization	Elliptical
Output Polarization	Elliptical
Insertion Loss	10%
Center Frequency (Fc)	100 MHz
RF Bandwidth	50 MHz
RF Power	< 1.0 Watt
Active Aperture	4 mm 'H' X 14 mm 'L'
Average Diffraction Efficiency	> 75%
Flatness Across Bandwidth	10%
Min Diffraction Efficiency	> 70%
Peak Valley at 633 mm(No RF Power)	<0.125
RMS at 633 mm	N/A
VSWR	< 2.0 : 1
Scan Angle	N/A
Time Bandwidth	N/A

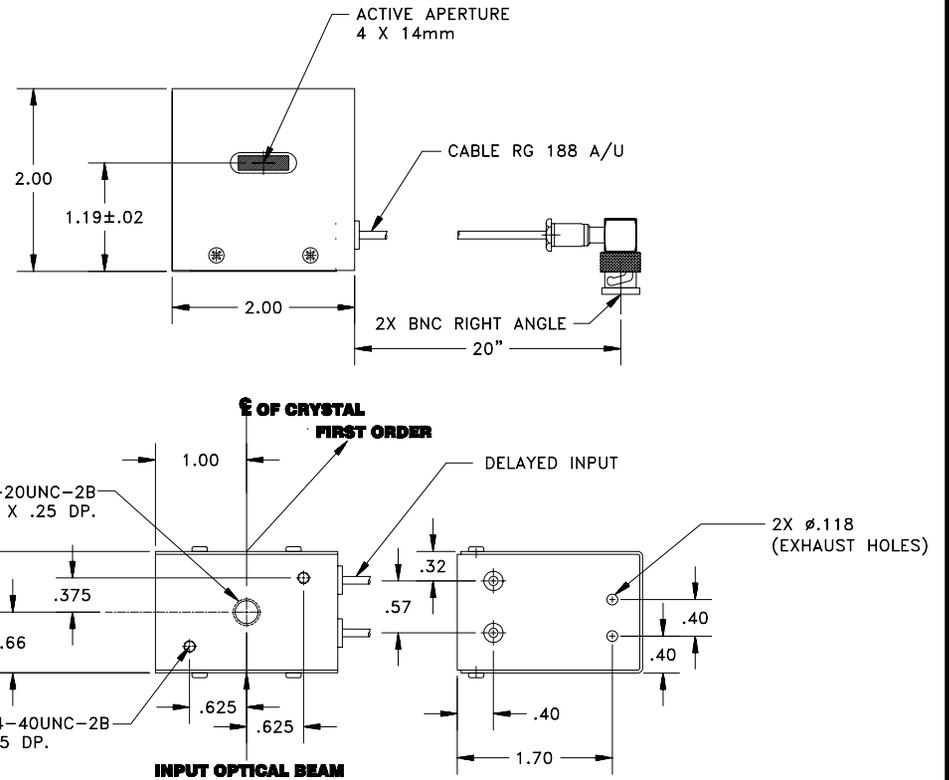

Notes:

1. 2 Element Phased Array
2. Input impedance is 50 Ohms.
3. A delay box, p/n: 97-02010-01, is connected between the RF output of the driver and the two inputs of the deflector.

For Reference Only

THIS DOCUMENT IS THE PROPERTY OF CRYSTAL TECHNOLOGY, INC. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF CRYSTAL TECHNOLOGY AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF CRYSTAL TECHNOLOGY.

TOLERANCES: .XX .XXX	DR	Geri Scholz 12/9/2003	Crystal Technology, Inc. DESCRIPTION: AODF 4100-UV		
MATERIAL:	CHK				
FINISH:	APP				
	APP		PART NUMBER:	REV:	SHEET 1 OF 1